


# A Low-thermal-budget MOSFET-based reservoir computing for temporal data classification

*Yanqing Li<sup>1,3</sup>, Feixiong Wang<sup>1,3</sup>, Heyi Huang<sup>1,3\*</sup>, Yadong Zhang<sup>1,3\*</sup>, Xiangpeng Liang<sup>2</sup>,  
Shuang Liu<sup>1,3</sup>, Jianshi Tang<sup>2\*</sup>, Huaxiang Yin<sup>1,3\*</sup>*

<sup>1</sup>State Key Laboratory of Fabrication Technologies for Integrated Circuits, Institute of Microelectronics of the Chinese Academy of Sciences;

<sup>2</sup>School of Integrated Circuits, Beijing Advanced Innovation Center for Integrated Circuits, BNRist, Tsinghua University;

<sup>3</sup>School of Integrated Circuits, University of Chinese Academy of Sciences.

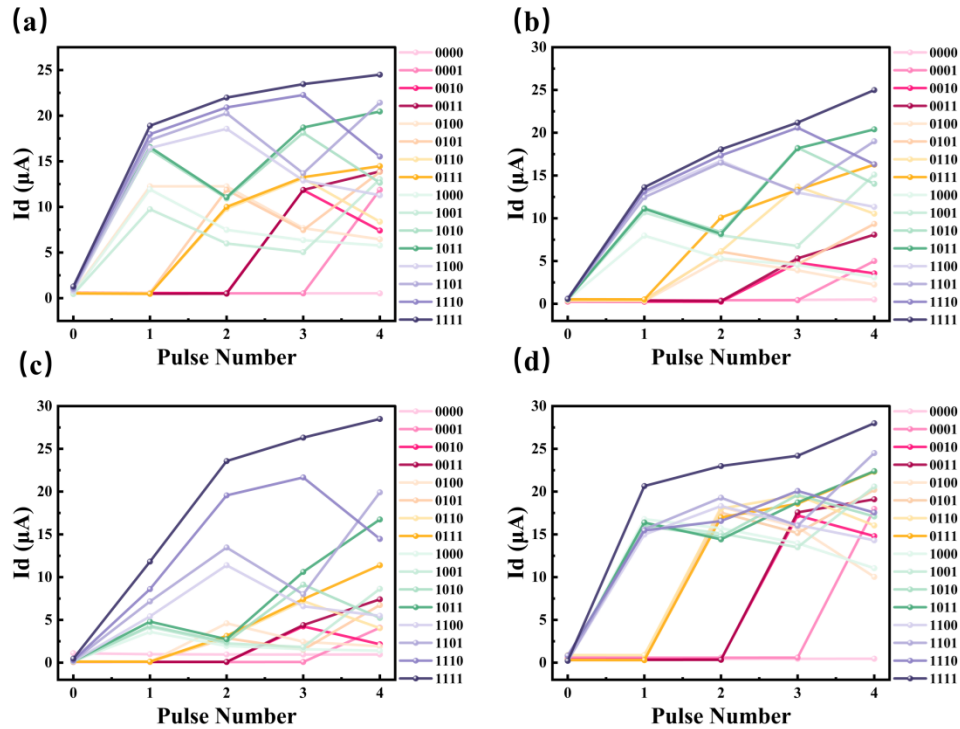

**Figure S1. Four-pulse current response data for the other four devices.**

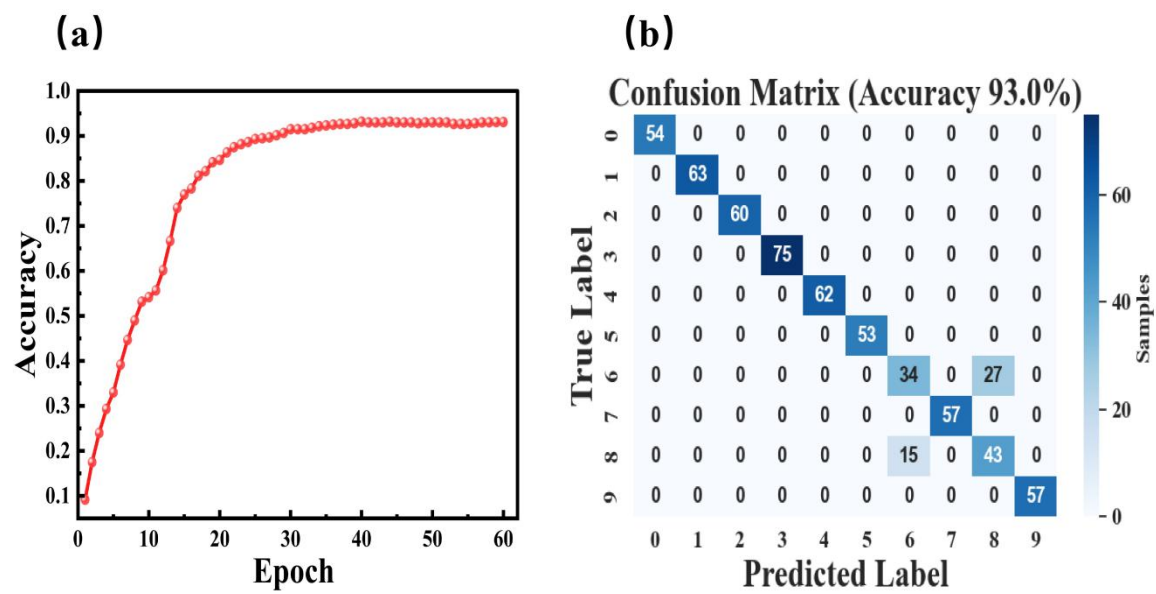


Figure S2. Results achieved by reusing response data from a single device for digit recognition tasks (a) Accuracy curve over epochs (b) Confusion matrix of recognition results.